

# TRIM<sup>®</sup> C320

## High-lubricity Synthetic

TRIM C320 is a high-lubricity, low-foam, synthetic coolant that approaches the "down-the-hole" machining performance of premium soluble oils. This product is exceptionally good on aluminum. Even with its very high performance, C320 meets or exceeds most stringent environmental standards.

### Synthetics



*An air tool manufacturer used C320 to eliminate two problems!*

#### **C320. The bottom line is long lasting performance.**

*An air tool manufacturer does operations on aluminum, drilling, reaming, boring, single-point threading and tapping, and grinding on steel. They switched to C320 to consolidate their need to a single fluid for all operations. C320 also eliminated two problems: dermatitis and issues with coolant attacking machine tool seals. Their machine operators find C320 very machine- and people-friendly.*



### Choose C320:

- Excellent extreme pressure (EP) lubricity to do many drilling, tapping, reaming, and form-grinding operations without any chlorine or sulfur-based EP additives
- A very versatile product which works well in mixed-metal situations
- Provides good corrosion inhibition on all common ferrous and nonferrous alloys
- Keeps grinding wheels clean and sharp for higher "G ratios", better surface integrity, and faster stock removal
- Operators like C320's very low odor, low foam, low mist, and light yellow working solution
- Keeps your machines clean while leaving a soft fluid film that protects the bare metal parts
- Machines are easily washed off with coolant working solution to minimize the buildup of residues and chips
- Exceptional sump life, great resistance to fungus and bacteria, and good tramp oil rejection
- C320 is a super product for aluminum wheel machining

### C320 especially for:

**Applications** — aluminum wheel machining, down the hole work, drilling, form grinding, reaming, and tapping

**Metals** — aluminum, cast iron, copper alloys, ferrous metals, nonferrous metals, and steel alloys

**Industries** — automotive, diecast, firearms, and job shop

**C320 is free of** — chlorine, DEA, nitride, phenolic compounds, and triazine

# TRIM<sup>®</sup> C320

## High-lubricity Synthetic



### Application Guidelines

- C320 has increased tendency to foam as the fluid temperature falls below 80°F (27°C).
- Concentration should be kept at 7.5% or higher for operations at lower SFPM, soft or "gummy" material, or operations where finish is a factor.
- C320 is not recommended in machine tools that rely on splash lubrication from the coolant; e.g., older screw machines or transfer machines.
- C320 is not recommended on magnesium or zirconium without special precautions.
- This product may "wash out" dirt and residues when a machine is first charged. Machines should be thoroughly precleaned with Whamex XT™.
- Concentrations of 7.5% - 10% usually give the best tool life, finish, and sump life; however, the best concentration for your operation should be determined by on-site testing.
- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at <https://www.2trim.us/distributors.php>, your District Sales Manager, or call our Tech Line at 1-800-537-3365.


### Physical Properties Typical Data

Color (Concentrate)	Yellow
Color (Working Solution)	Light yellow
Odor (Concentrate)	Mild, sweet
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D92-90)	> 214°F
pH (Concentrate as Range)	9.5 - 9.7
pH (Typical Operating as Range)	8.8 - 9.2
Coolant Refractometer Factor	2.2
Titration Factor (CGF-1 Titration Kit)	0.49
Digital Titration Factor	0.0160
V.O.C. Content (ASTM E1868-10)	121 g/l


### Recommended Metalworking Concentrations

Light duty	4.0% - 6.5%
Moderate duty	6.5% - 8.5%
Heavy duty	8.5% - 10.0%
Design Concentration Range	4.0% - 10.0%

### Concentration by % Brix

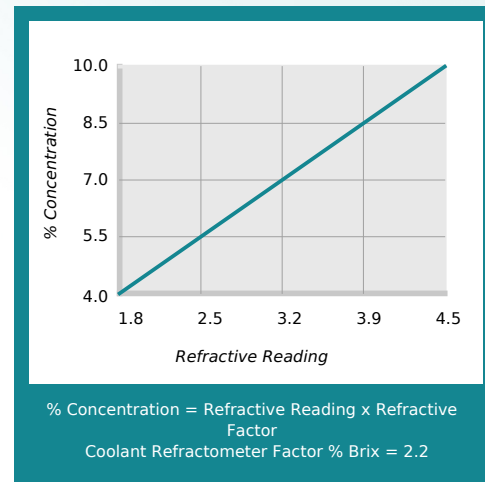

### Concentration by Titration

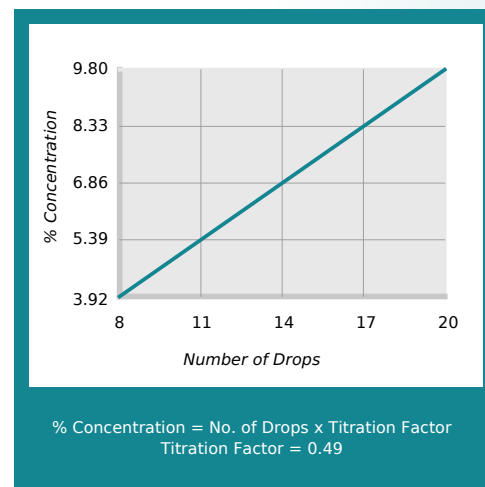

### Health and Safety

Request SDS



# TRIM<sup>®</sup> C320

## High-lubricity Synthetic



### Mixing Instructions

- Recommended usage concentration in water: 4.0% - 10.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: [apps.masterfluids.com/makeup/](https://apps.masterfluids.com/makeup/).
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.



1-gallon jug  
SKU: C320/1  
UPC-12: 641238031635



5-gallon pail  
SKU: C320/5  
UPC-12: 641238031659



54-gallon drum  
SKU: C320/54  
UPC-12: 641238031666



270-gallon tote  
SKU: C320/NR270P  
UPC-12: 641238033851

### Additional Information

- Use Master STAGES™ Whamex XT™ for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM<sup>®</sup> is a registered trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.
- Master STAGES™ and Whamex XT™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

[https://2trim.us/di/?i=na\\_en-us\\_C320](https://2trim.us/di/?i=na_en-us_C320)



501 West Boundary Street  
Perrysburg, OH 43551-1200  
USA

+1 419-874-7902

info@masterchemical.com

masterfluids.com/na/en-us/