


# TRIM<sup>®</sup> E925AE

## DCHA-free, High-performance Emulsion

TRIM E925AE utilizes a proprietary lubricity package to deliver exceptional surface finish and tool life on difficult-to-machine aerospace materials. Designed to lower total cost and improve manufacturing efficiency thanks to extended sump life. Environmentally friendly emulsion is free of DCHA, boron, chlorinated paraffins, and other halogens. Mild contact nature and low initial-charge odor provide an operator-friendly environment.

### Emulsions

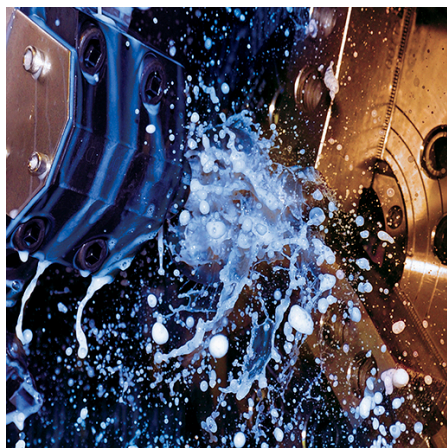

*Gear up with the TRIM emulsion designed to meet your production needs.*

#### ***Geared up for production:***

*With superior lubricity and a higher oil content, TRIM<sup>®</sup> emulsions provide a greater boundary layer between the tool and the material. TRIM Emulsions are ideal for lower, less than 600 SFPM, applications such as broaching, reaming, deep hole drilling, drilling, tapping, and centerless grinding.*

*Emulsions work well for machining copper, yellow metals, steel alloys, cast aluminums, wrought aluminums, and tough-to-machine titanium and nickel-based alloys.*



#### **Choose E925AE:**

- DCHA free
- Extended sump life for lower operating costs
- Protects sensitive aluminum and nonferrous alloys
- Excellent lubricity without chlorinated paraffins
- Provides superior results in a wide range of operations
- Superior corrosion resistance
- Appropriate for most high-pressure systems
- Low product odor
- Mild operator contact properties
- Soft fluid film protects chucks, ways, and tool holders
- Rinses off for easy parts cleanup before assembly, painting, or plating

#### **E925AE especially for:**

**Applications** — band sawing, centerless grinding, corrosion inhibition, creep-feed grinding, drilling, form cylindrical grinding, internal grinding, reaming, and sawing

**Metals** — 6000 series aluminum, aerospace alloys, aerospace aluminum alloys, aluminum, brass, bronze, cast aluminum, cast iron, composites, copper, glass, heat-treated steel, high-carbon steel, high-nickel alloys, nonferrous metals, plastics, stainless steels, steels, and titanium

**Industries** — aerospace and firearms

**E925AE is free of** — boron, chlorinated paraffin, chlorine, DCHA, and halogens

# TRIM<sup>®</sup> E925AE

**DCHA-free, High-performance Emulsion**



## Application Guidelines

- Maintaining concentration from 7.5%-10% provides the best sump life and corrosion inhibition.
- E925AE is not recommended on magnesium or other reactive materials.
- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at <https://www.2trim.us/distributors.php>, your District Sales Manager, or call our Tech Line at 1-800-537-3365.


## Physical Properties Typical Data

Color (Concentrate)	Light yellow to amber
Color (Working Solution)	White
Odor (Concentrate)	Mild amine
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D93-08)	> 223°F
pH (Concentrate as Range)	9.0 - 9.6
pH (Typical Operating as Range)	8.8 - 10.0
Coolant Refractometer Factor	1.0
Titration Factor (CGF-1 Titration Kit)	0.69
Digital Titration Factor	0.0244
V.O.C. Content (ASTM E1868-10)	151 g/l


## Recommended Metalworking Concentrations

Light duty	5.0% - 6.5%
Moderate duty	6.5% - 8.5%
Heavy duty	8.5% - 10.0%
Design Concentration Range	5.0% - 10.0%

## Concentration by % Brix

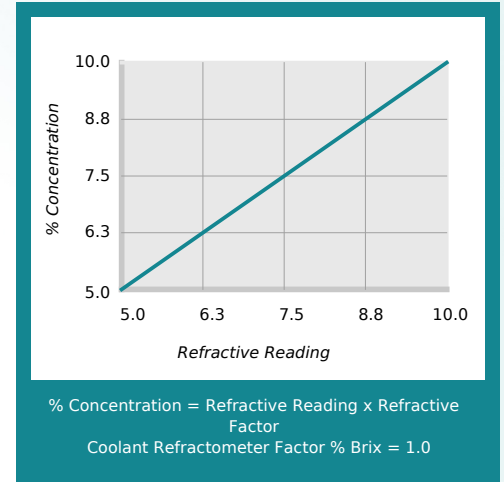

## Concentration by Titration

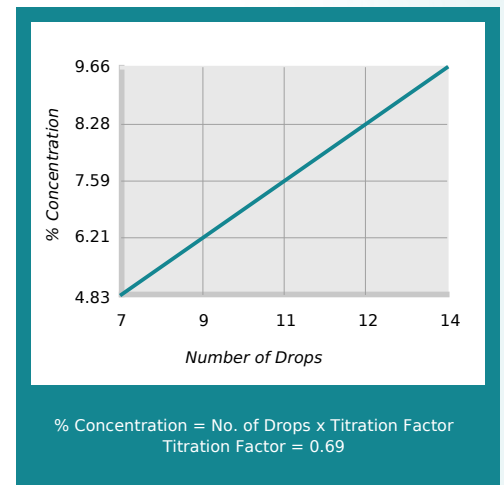

## Health and Safety

Request SDS



# TRIM<sup>®</sup> E925AE

**DCHA-free, High-performance Emulsion**



## Mixing Instructions

- Recommended usage concentration in water: 5.0% - 10.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: [apps.masterfluids.com/makeup/](https://apps.masterfluids.com/makeup/).
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.



1-gallon jug  
SKU: E925AE/1  
UPC-12: 641238077121



5-gallon pail  
SKU: E925AE/5  
UPC-12: 641238077114



54-gallon drum  
SKU: E925AE/54  
UPC-12: 641238077107



270-gallon tote  
SKU: E925AE/NR270P  
UPC-12: 641238077145


TRIM<sup>®</sup> E925AE | ©2018-2021 Master Fluid Solutions<sup>®</sup> | 2021-12-27


## Additional Information

- Use Master STAGES<sup>™</sup> Whamex<sup>™</sup> for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM<sup>®</sup> is a registered trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.
- Master STAGES<sup>™</sup> and Whamex<sup>™</sup> are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

[https://2trim.us/di/?i=na\\_en-us\\_E925AE](https://2trim.us/di/?i=na_en-us_E925AE)



 501 West Boundary Street  
Perrysburg, OH 43551-1200  
USA

 +1 419-874-7902

 [info@masterchemical.com](mailto:info@masterchemical.com)

 [masterfluids.com/na/en-us/](https://masterfluids.com/na/en-us/)

