

TRIM® SC620

Premium Low-oil Semisynthetic

TRIM SC620 is a high-lubricity, low-foam, low-odor, semisynthetic cutting and grinding fluid concentrate for high performance machining and grinding environments. SC620 uses a proprietary blend of mineral oil, EP-additives, and lubricity agents to control built-up edge, improve tool life, and deliver the finishes historically achieved using soluble oils. This unique balance of lubricity, wetting, and cooling characteristics is engineered to improve semisynthetic performance on stainless steel, aluminum alloys, and other high-end materials.

Semisynthetics



A Houston, TX high-volume facility cutting high-nickel-alloy stainless and carbon steel was getting less than desired sump life and low run speeds.

A case for SC620:

A Houston, TX high-volume facility cutting high-nickel-alloy stainless and carbon steel was getting less than desired sump life and low run speeds. Their existing coolant was tested against two other brands, one being TRIM SC620. The operator was impressed with how clean the machines were with the SC620. Within just three weeks, results were dramatic, running "full load" they had used a mere 1.5 gallons of SC620 concentrate in the 120-gallon sump with no coolant in the chip hoppers and skimmers, as was the case with the others. They switched to SC620 and have greatly extended sump life, better performance, and faster machine speeds. Run long with SC620.



Choose SC620:

- Excellent sump life
- Eliminates foam problems associated with most semisynthetics
- Low oil content for reduced carry-off and lower residue
- Versatile enough to maximize performance in most grinding, sawing, drilling, turning, and milling operations by simply varying concentrations with operation severity
- Provides excellent lubricity to do tapping and other "down-the-hole" operations in aluminum, and most steels, including many stainless steels
- Rejects tramp oils rapidly for easy recycling with good sump life
- Easily recycled or disposed of using conventional techniques and equipment

SC620 especially for:

Applications — band sawing, cutting, cylindrical grinding, down the hole work, drilling, form cylindrical grinding, grinding, in-feed centerless grinding, internal grinding, plain grinding, reaming, roll threading, surface grinding, surface milling, tapping, thread forming, through-feed centerless grinding, and turning

Metals — 6000 series aluminum, aluminum, aluminum alloys, cast aluminum, composites, copper alloys, exotic alloys, heat-treated steel, high-carbon steel, high-nickel alloys, nonferrous metals, plastics, stainless steels, steels, tool steels, and wrought aluminum

Industries — general industry and job shop

SC620 is free of — animal derived materials and NPEs

TRIM[®] SC620

Premium Low-oil Semisynthetic



Application Guidelines

- SC620 is a superior product for surface and cylindrical grinding as well as through-feed centerless grinding.
- High-torque operations or operations on soft material often benefit from higher concentrations.
- Concentrations in excess of 7% typically offer the best sump life and tool life. However, the optimum concentration for your operations is best determined by on-site testing.
- Not recommended for machines dedicated to cast iron due to potential for iron uptake.
- The minimum recommended concentration is 5% on steel.
- Not recommended on materials that chemically react with water (i.e. magnesium and zirconium).
- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at <https://www.2trim.us/distributors.php>, your District Sales Manager, or call our Tech Line at 1-800-537-3365.


Physical Properties Typical Data

Color (Concentrate)	Yellow
Color (Working Solution)	Light Yellow
	Microemulsion
Odor (Concentrate)	Mild amine
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D93-08)	> 199°F
pH (Concentrate as Range)	10.1 - 10.5
pH (Typical Operating as Range)	8.8 - 10.4
Coolant Refractometer Factor	1.7
Titration Factor (CGF-1 Titration Kit)	0.63
Digital Titration Factor	0.0169
V.O.C. Content (ASTM E1868-10)	149 g/l


Recommended Metalworking Concentrations

Light duty	5.0% - 6.5%
Moderate duty	6.5% - 8.5%
Heavy duty	8.5% - 10.0%
Design Concentration Range	5.0% - 10.0%

Concentration by % Brix

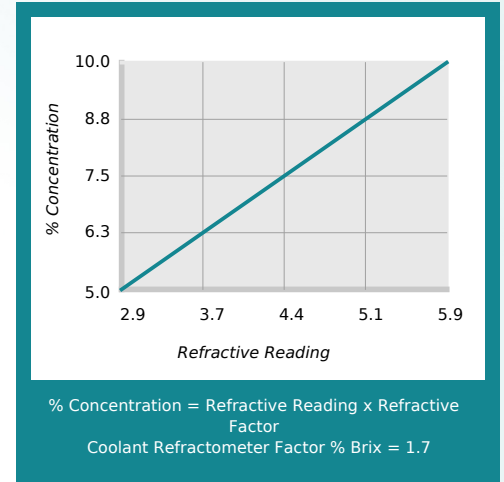

Concentration by Titration

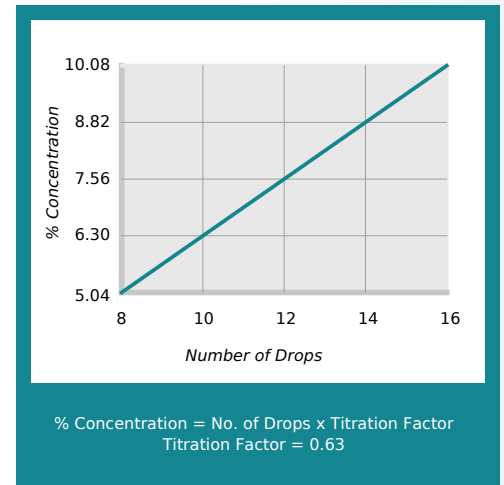

Health and Safety

Request SDS



TRIM[®] SC620

Premium Low-oil Semisynthetic



Mixing Instructions

- Recommended usage concentration in water: 5.0% - 10.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: apps.masterfluids.com/makeup/.
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.



1-gallon jug
SKU: SC620/1
UPC-12: 641238071389



5-gallon pail
SKU: SC620/5
UPC-12: 641238071372



54-gallon drum
SKU: SC620/54
UPC-12: 641238071365



270-gallon tote
SKU: SC620/NR270P
UPC-12: 641238071402

Additional Information

- Use Master STAGES™ Whamex XT™ for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM[®] is a registered trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.
- Master STAGES™ and Whamex XT™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

https://2trim.us/di/?i=na_en-us_SC620



501 West Boundary Street
Perrysburg, OH 43551-1200
USA

+1 419-874-7902

info@masterchemical.com

masterfluids.com/na/en-us/