


# TWIN HEAVY DUTY CONCRETE CLEANER

## DEGREASER/CLEANERS

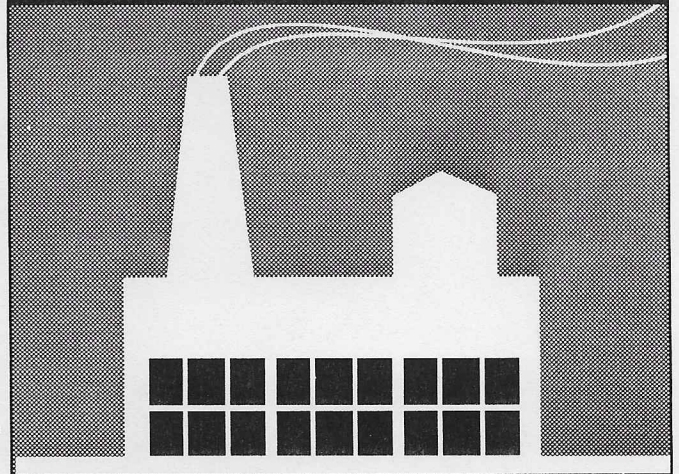

### Description

A unique water based concrete cleaner that removes rubber burn tire marks and heavy oils from concrete floors.


This high active cleaner is fortified with alkaline builders, sequestrants, metal corrosion inhibitors, solubilizers and various detergents to insure rapid removal of grease and oil from the floors' surface

### ✓ Features

- ✓ *Controlled foam*
- ✓ *Strong alkali buffered system*
- ✓ *Contains water soluble solvents*
- ✓ *Removes rubber burn marks*
- ✓ *USDA authorized*

### ✓ Benefits

- ✓ *Excellent for use with automatic scrubbers and wet-vacuum systems*
- ✓ *Added strength for removal of heavy food generated grease and oils but buffered for added safety and equipment compatibility*
- ✓ *Allows efficient removal of petroleum oils, grease and rubber tile burns*
- ✓ *Replaces flammable solvent products for this application*
- ✓ *May be used in federally inspected meat, dairy, egg and poultry processing plants*



**Twin Specialties Corp.**  
Oils & Chemicals for Industry  
15 East Ridge Pike  
Conshohocken, PA 19428

(610) 834-7900  
FAX (610) 834-7903



# TECHNICAL DATA

## Specifications

Color .....	Yellow-Green	Freeze-Thaw Stable .....	Yes
Odor .....	Pleasant	Stability .....	1 Year Minimum
Active .....	21 ± .5	Flash Point.....	None
pH Concentrate.....	12.7 ± .5	Toxic Solvent Fumes .....	None
pH Use Dilution.....	10.7 ± .5	Free Rinsing .....	Yes
Solubility .....	Complete in Water	Biodegradable.....	Yes
Specific Gravity.....	1.045 gr/cc	Phenols or Cresols .....	None
Density .....	8.71 lbs/gals	Corrosive .....	No (Slight on Aluminum)
High Temp. Cloud .....	Above 125°F	Detergency .....	Unique Deep Cleaning
Low Temp. Cloud.....	Below 32°F	Oil Emulsification .....	Excellent

## Uses

The most effective aqueous cleaner for removing heavy oil and grease soils, and resistant rubber tire marks from concrete, terrazzo, stone, tile, brick, marble, magnesite, conductive cement, ceramic tile, steel, sealed wood, painted and similar hard surfaces. Also an outstanding

general purpose cleaner, safe on all hard surfaces when diluted as per directions.

## Directions

Dilute concentrate with hot or cold water for use.

**General Cleaning-** Use 1 to 2 oz. per gallon of water.

**Heavy Duty Cleaning-** Use 1 pint per gallon of water.

**Rubber Tire Mark Removal-** Use 1 quart per gallon of water

Adjust the use level to provide the most effective cleaning of the soiling conditions found on each job.

Apply diluted cleaner with sponge, mop, brush, sprinkler, sprayer, foamer or automatic floor machine. For severe soiling, let soak as long as possible but do not allow floor to dry. Agitation helps to loosen severe soiling. Machines equipped with steel, fiber or nylon brushes, or abrasive pads are best for severely soiled areas. Where available a high pressure washer may suffice for agitation and assist in flushing away loosened soils. Rinse thoroughly two or more times if floor is being prepared for sealing, otherwise a single rinse is difficult.

## Authorization & Safety

Authorized by the USDA for Use in Federally Inspected Meat and Poultry Plants

**WARNING: IRRITANT: MAY BE HARMFUL IF SWALLOWED**

CONTAINS: 2-BUTOXU ETHANOL, POTASSIUM HYDROXIDE, SODIUM SILICATE

Avoid contact with skin, eyes and clothing.  
Do not ingest

For Eyes: Flush thoroughly with water for 15 minutes. Get medical aid.

For Skin: Wash thoroughly with soap and water. If irritation persists, get medical aid.

If Ingested: Do not induce vomiting. Give water, milk, or gelatin. Get medical aid.

For sale to, use and storage by Service Personnel Only

OSHA Material Safety data sheet available upon request

*"All technical data, recommendations and services are accurate to the best of our knowledge. Seller assumes no responsibility for the results obtained or damages incurred from their use by the Buyer in whole or in part. No warranty, including those of merchantability or fitness for a particular purpose, is expressed or implied since the method of application and its use is beyond our control. There are no warranties which extend beyond the description on the face hereof."*